


# BATEMAN



RB17

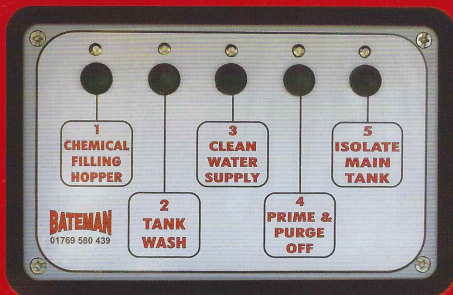

## BATEMAN ENGINEERING LIMITED

BYCOTT, CHULMLEIGH, DEVON EX18 7DS

Telephone: 01769 580439

Fax: 01769 581023

email: mail@bateman-eng.co.uk

## SPECIFICATIONS RB17

### Dimensions (dependent upon specification)

Height	3.3m
Width	2.8m
Length	7.0m
Ground Clearance	0.85m
Wheel Base	3.3m
Turning Radius	4.8m
Weight	6110kg
Fuel Capacity	220 litres

### Steering

Positive Link 2/4-wheel steer, fully hydraulic

### Suspension

Hydraulic fully active front and rear

### Wheel Track

Hydraulic adjustable axles with 18 inches variable track width

### Engine and Transmission

John Deere 125hp 4-cylinder water-cooled Turbo charged diesel  
Fully Hydrostatic four wheel drive, variable from 0 up to 40kph  
Hydrostatic primary braking with manual park brake, automatically applied when the engine is stopped.

### Cab

Steel construction, with all round panoramic tinted glass  
Rubber mounted suspension  
Carbon filtration  
Cladded and soundproofed  
Automatic climate control system (heating and cooling)  
CD/Radio player  
Roof mounted 360 degree working lights, and warning beacon  
Wash wipe windscreen wiper  
Large extendable wing mirrors  
Fresh water hand/eyewash  
Pneumatically operated step  
Air suspension seat with fore and aft movement  
Raise, lower and tilting steering column  
External airline pickup point

### Sprayer

Tank, Stainless Steel 2500 litres fully baffled, Tank contents gauge with dry indicator

Boom Bateman 12/20/24 metre Bateman Contour,  
Bateman 12/18/20/24 metre Bateman Contractor Contour,  
Both having 'Gull Wing' folding

Filling 4 cylinder 270l/min piston diaphragm pump  
Stainless steel chemical hopper, can wash/bowl rinse, with twin venturis  
Self-fill or bowser quick fill

Controls LH5000 (GPS enabled)  
Auto priming system on all machines  
Pneumatic diaphragm line valves  
Ramsay box

Demounting Full set of demount legs and jacks

### Wheels

Row crops 12.4R32 or 14.9R28

### Controls

Joystick Command arm forward / reverse and sprayline controls  
Electro-hydraulic boom controls (lift/lower/tilt)  
Hydraulic spool for pump engagement

### Options

3000 litre fully baffled stainless steel tank  
Triplet nozzles with 3 sets of jets  
Twin stainless steel spraylines including 2 sets of jets  
Electric tapping system giving in cab control of tank and sprayline rinse.  
Spreader skid unit, mudguards and demount jacks  
Bateman Boutmarker  
Low ground pressure tyres  
Air assisted sleeve boom  
400 litre/minute 6 cylinder pump with 3" plumbing  
Twin pumps including 3" plumbing

We reserve the right to alter specifications without prior notice

**Our policy is one of continuous development**