

BATEMAN



RB26

SPECIFICATIONS RB26

Dimensions (dependent upon specification)

Height	3.3m
Width	2.8m
Length	7.0m
Ground Clearance	0.85m
Wheel Base	3.3m
Turning Radius	4.8m
Weight	6610kg
Fuel Capacity	220 litres

Steering

Positive Link 2/4-wheel steer, fully hydraulic

Suspension

Hydraulic fully active front and rear

Wheel Track

Hydraulic adjustable axles with 18 inches variable track width

Engine and Transmission

John Deere 175hp 6-cylinder water-cooled Turbo charged diesel
Fully Hydrostatic four wheel drive, variable from 0 up to 40kph
Hydrostatic primary braking with manual park brake, automatically applied when the engine is stopped.

Cab

Steel construction, with all round panoramic tinted glass
Rubber mounted suspension
Cushioned and soundproofed
Carbon filtration
Automatic climate control system (heating and cooling)
CD/Radio player
Roof mounted 360 degree working lights, and warning beacon
Wash wipe windscreen wiper
Large extendable wing mirrors
Fresh water hand/eyewash
Pneumatically operated step
Air suspension seat with fore and aft movement
Raise, lower and tilting steering column
External airline pickup point

Sprayer

Tank, Stainless Steel	3000 litres fully baffled, Tank contents gauge with dry indicator
Boom	Bateman 12/20/24 metre Bateman Contour, Bateman 12/18/20/24 metre Bateman Contractor Contour, Both having 'Gull Wing' folding OR Bateman (V.G.) Variable Geometry up to 36m V.G. boom options 12/20/24m 12/24/ to either 28-30-32 or 36m
Filling	4 cylinder 270l/min piston diaphragm pump Stainless steel chemical hopper, can wash/bowl rise, with twin venturis Self-fill or bowser quick fill
Controls	LH5000 (GPS enabled) Auto priming system on all machines Pneumatic diaphragm line valves Ramsey box
Demounting	Full set of demount legs and jacks

Wheels

Row crops 12.4/R32 or 14.9/R28

Controls


Joystick Command arm forward / reverse and sprayline controls
Electro-hydraulic boom controls
Hydraulic spool for pump engagement

Options

Tripod nozzles with 3 acts of jets
Twin stainless steel spraylines including 2 sets of jets
Electric tapping system giving in cab control of tank and sprayline rise.
Spreader skid unit, mudguards and demount jacks
Bateman Bowmarker
Low ground pressure tyres
Air assisted slowee boom
400 litres/minute 6 cylinder pump with 3" plumbing
Twin pumps including 3" plumbing

We reserve the right to alter specifications without prior notice

Our policy is one of continuous development

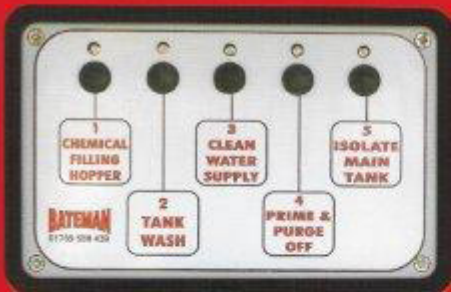

BATEMAN ENGINEERING LIMITED
BYCOTT, CHULMLEIGH, DEVON EX18 7DS

Telephone: 01769 580439

Fax: 01769 581023

email: mail@bateman-eng.co.uk